

96330I Internal Safety Shutoff & Operating Valve w/ Integral Position Indicator

The Shand & Jurs 96330I Internal Safety Shutoff and Operating Valve provides automatic, foolproof, quick acting shutoff, of product flow in tanks and manifold lines. Extremely versatile, it can be mounted in the tank, or in line.

This valve is used most effectively as a safety shutoff or operating valve in manifold lines. Its action is bi-directional with respect to flow and pressure, and its balanced piston design resists opening due to tank or line pressure.

This valve also is ideally suited for "switch service" of LP-GAS, anhydrous ammonia and similar products. Alternate materials of construction may be specified to meet other product requirements and operating temperatures in the range of -50° to +150°F.

The 96330I Internal Safety Valve is designed to be held in a normally closed or open position by a spring-loaded balanced type piston and seat ring assembly. The valve closes when operating pressure is removed.

Several unique items are incorporated, thus providing the most reliable quick-closing shutoff valve available.

A) The piston seal is sensitive to pressure conditions, and the configuration provides ideal wiping and bearing action.

B) A visual indicator provides a continuous positive indication of valve position. The indicator is physically attached to the actual valve mechanism giving a true indication of valve position.

C) Easy Maintenance-New one piece seals greatly improve maintainability.

D) Optional redundant springs - either capable of closing the valve.



Features

- Positive Position Indicator
- Optional Redundant Duel Springs provide added protection
- One piece self-adjusting seals greatly improve maintainability
- Fusible plugs automatically release operating pressure in case of fire
- Fail safe under all conditions, unaffected by tank or line pressure
- Standard valve is adaptable to ambient fluid products such as LP-Gas and/or Ammonia
- Efficient as an operational valve or on-off service with flows and pressure in either direction
- Maximum 1.0 SCFM air leakage @ 100 psig between tank and line. Bubble tight from product to hydraulic system

Specifications:**Pilot Operating Data:**

Operating Pressure:
Range: 450 to 1100 PSIG

Operating Fluid:
Mineral Oil or Synthetic Fire Resistant Fluid

Valve Size:

2"-10" with Various Mounting Flange Sizes,
ANSI B16.5 Class Raised Face (Full Flange or Partial
"J" Flange) 150 lb. or 300 lb.

Main Valve Data:


Type of Service:
LP - Gas, Ammonia and similar

Maximum Product Pressure:
*250/375 PSIG (See Table AB)

Product Temperature Range:
-20°F to +150°F. (Standard)
-50°F to +150°F. (Special)

Tank Valve Size Inches	Tank Mtg.	In-Line Mtg.
	CV	
2	75	68
3	165	123
3 x 4	165	142
4	290	245
4 x 6	290	267
6	635	493
6 x 8	635	571
8	1120	878
8 x 10	1120	938
8 x 12	1120	943
8 x 14	1120	952
8 x 16	1120	960
8 x 20	1120	966
10	1612	1264
10 x 12	1612	1362
10 x 14	1612	1372
10 x 16	1612	1383
10 x 18	1612	1395

Principle of Operation:

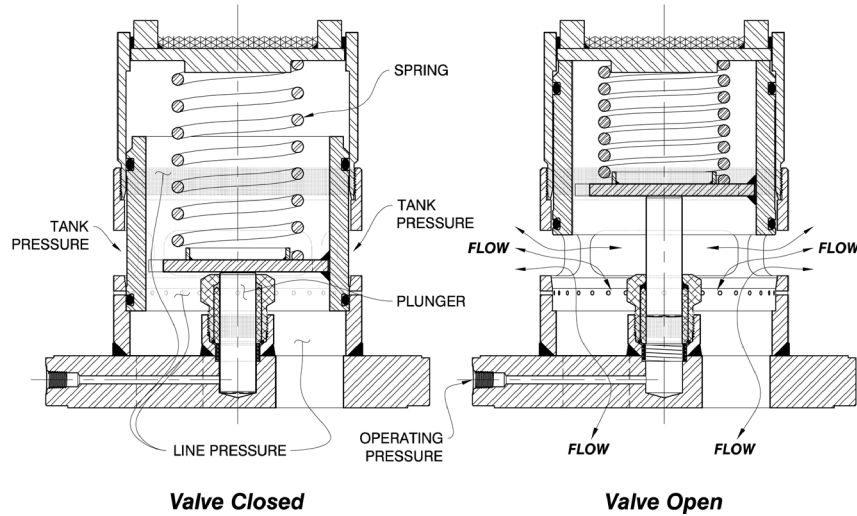

To open the valve, hydraulic fluid pressure is applied to the plunger which moves to open the normally closed piston.

Quick shutoff is accomplished by the following remote controlled mechanism:

1. Fusible plug(s) in the operating hydraulic line which release at a predetermined temperature;
2. Frangible element(s) which can be quickly snapped off by hand;
3. A quick manual release on the hydraulic operating fluid source;
4. Fail-safe pneumatic operator for remote valve closure.
5. Remote through special solenoid valve.

Operating pressure to fully open valve ranges from 450 to 1100 psig depending on product pressure and valve size. Valves are provided with raised face flanges as standard to match ANSI 300 lb. Optional oversize flanges are available when required.

Typical Safety Valve Installation:

Filling And Discharge Installation Using Shut-Off Valve And In-Line Housing



Positive Shut-Off Valve Is Required When Used As Filling And Discharge Connection

In-Line Housing




Filling And Discharge Installation Using Shut-Off Valve And Pipe Reducer

Positive Shut-Off Valve Is Required When Used As Filling And Discharge Connection

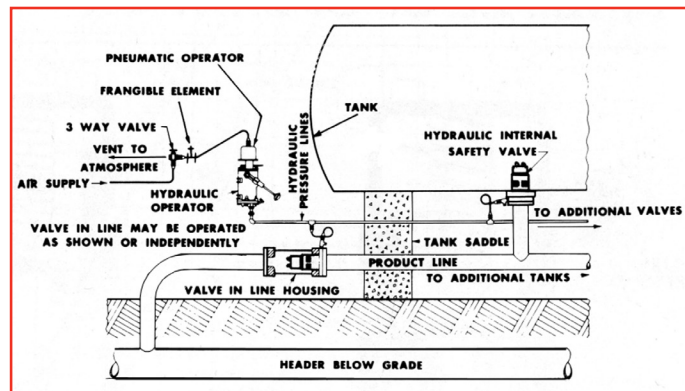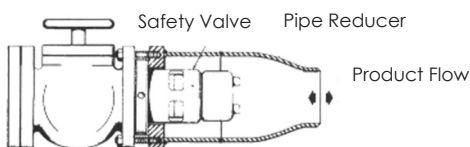

All designs subject to change. Certified dimensions and specifications available upon request.

Dimensions:

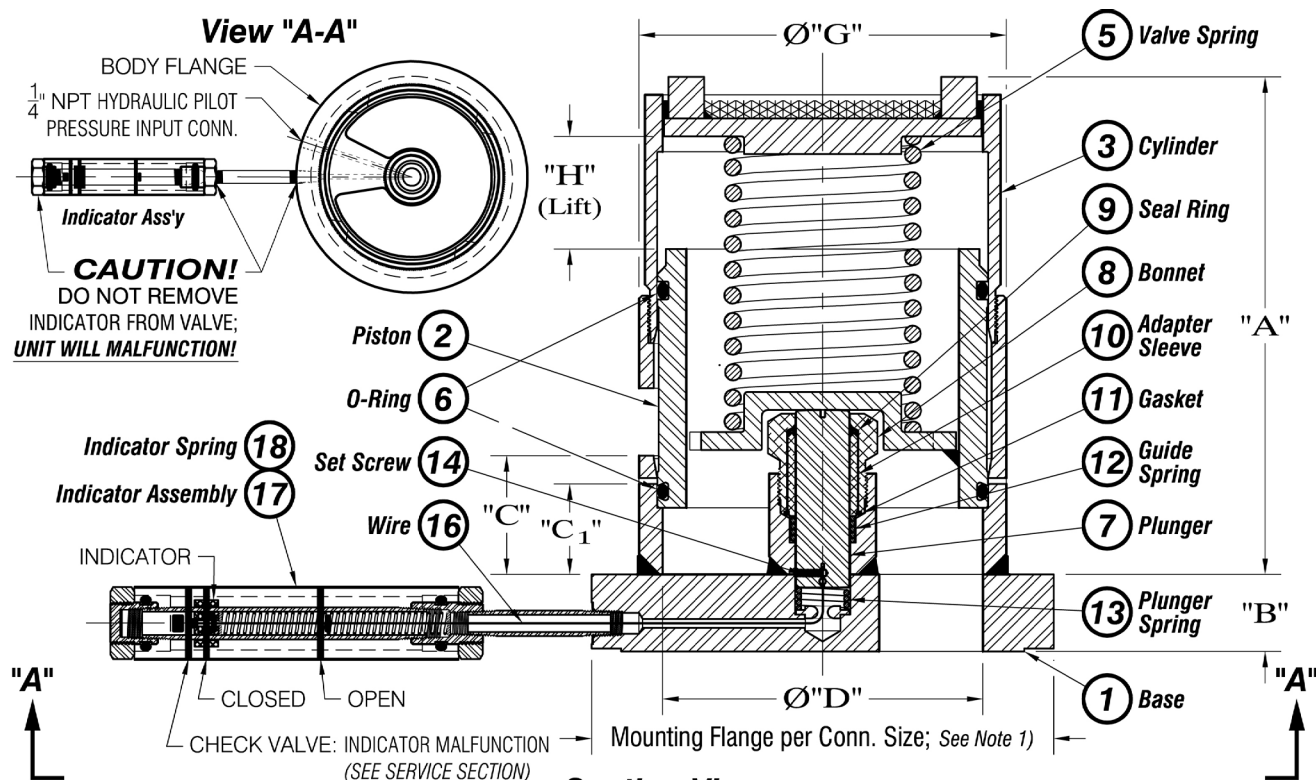

Section View

Size	A	B	C	C1	D	G	H	Net Weight lb.
2"	8 7/8"	7/8"	1 15/16"	1 1/16"	2 7/16"	3 5/8"	1 1/2"	16
3"	7 13/16"	1 1/8"	1 7/8"	1 7/16"	3 5/8"	4 11/32"	1 1/2"	18
3" x 4"	7 13/16"	1 1/8"	1 7/8"	1 7/16"	3 5/8"	4 11/32"	1 1/2"	23
4"	9 1/8"	1 1/4"	2 21/32"	2 1/8"	4 5/8"	5 13/16"	1 5/8"	34
4" x 6"	9 1/8"	1 7/16"	2 21/32"	2 1/8"	4 5/8"	5 13/16"	1 5/8"	48
6"	10 9/16"	1 5/8"	2 1/2"	1 7/8"	6 5/8"	7 27/32"	2 1/4"	62
6" x 8"	10 9/16"	1 5/8"	2 1/2"	1 7/8"	6 5/8"	7 27/32"	2 1/4"	78
8"	12 9/16"	1 5/8"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	115
8" x 10"	12 9/16"	1 7/8"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	142
8" x 12"	12 9/16"	2"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	230
8" x 14"	12 9/16"	2 1/8"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	235
8" x 16"	12 9/16"	2 1/8"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	240
8" x 20"	12 9/16"	2 1/8"	2 5/8"	2"	7 15/16"	9 1/2"	3 1/4"	245
10"	14 11/16"	1 7/8"	3 1/2"	2 5/8"	10"	11 1/2"	4"	250
10" x 12"	14 11/16"	1 7/8"	3 1/2"	2 5/8"	10"	11 1/2"	4"	260
10" x 14"	14 11/16"	2 1/8"	3 1/2"	2 5/8"	10"	11 1/2"	4"	280
10" x 16"	14 11/16"	2 1/4"	3 1/2"	2 5/8"	10"	11 1/2"	4"	300
10" x 18"	14 11/16"	2 1/4"	3 1/2"	2 5/8"	10"	11 1/2"	4"	320

Mounting Flange	"J" 300 Lb	"J" 150 Lb	"Full" 300 Lb
2"	4 1/4"	4"	6 1/2"
3"	5 3/4"	5 1/4"	8 1/4"
3" x 4"	7"	6 3/4"	10"
4"	7"	6 3/4"	10"
4" x 6"	9 3/4"	8 5/8"	12 1/2"
6"	9 3/4"	8 5/8"	12 1/2"
6" x 8"	12"	10 5/8"	15"
8"	12"	10 5/8"	15"
8" x 10"	14 1/8"	13 1/4"	17 1/2"
8" x 12"	16 1/2"	16"	20 1/2"
8" x 14"	19"	17 5/8"	23"
8" x 16"	21 1/8"	20 1/8"	25 1/2"
8" x 20"	25 5/8"	23 3/4"	30 1/2"
10"	14 1/8"	13 1/4"	17 1/2"
10" x 12"	16 1/2"	16"	20 1/2"
10" x 14"	19"	17 5/8"	23"
10" x 16"	21 1/8"	20 1/8"	25 1/2"
10" x 18"	23 3/8"	21 1/2"	28"

NOTE 1. Sizes with standard "J" flanges are furnished without bolt holes. Outside diameter of flange matches inner circle of bolt holes "F" or "FF". Full size flanges "K" are furnished with bolt holes and meet ANSI dimension standards (not shown).

All designs subject to change. Certified dimensions and specifications available upon request.